

EMOTION COLORED BODY PORCELAIN TILE

TILE PERFORMANCE DATA

PHYSICAL PROPERTIES	TEST ASTM	NORTH AMERICAN STANDARD A137.1*	RESULTS
Water absorption *	C373	≤ 0.5%	COMPLY WITH ANSI A137.1
DCOF Average dynamic coefficient of friction **	BOT 3000 test	≥ 0.42	≥ 0.42
Resistance to freeze/thaw cycling *	C1026	As reported	RESISTANT
Warpage (edge)	C485	Warpage ± 0.4% or ± 0.05 in	COMPLY WITH ANSI A137.1
Warpage (diagonal)	C485	Warpage ± 0.4% or ± 0.07 in	COMPLY WITH ANSI A137.1
Wedging	C502	± 0.25% or ± 0.03 in	COMPLY WITH ANSI A137.1
Chemical resistance	C650	As reported	UNAFFECTED
Breaking strength	C648	250 lbf or greater	COMPLY WITH ANSI A137.1

- Average values referred to our production and related to the matt finish of the product.
- ** As far as values relating to the matt finish of the product and to tests carried out by certified external laboratories whose results are avaible upon request at Headoffice, we are willing to check the lot you are interested in purchasing.

C499

Range: 0.04 in

- Be sure to use tiles belonging to the same caliber.
- Test results are available on request.
- Landmark tiles can be slippery when wet. We recommend to make sure that the surface is always dry.

 The information provided can be subject to change. Please refer to Icusa.com for the latest, most accurate and up-to-date information.

COMPLY WITH ANSI

A137.1





















Surfaces that evoke American walnut, spaces that recall the shapes of nature. With Emotion porcelain tiles the space dresses with sober elegance, for floors and walls to which time has given a marked identity. The surface is soft and natural. A slight and imperceptible micro texture evokes the warm feel of wood. Pleasant to the touch, profound atmosphere. **SIZE** 8"x40"

SIZE 8"x40"



HAPPY WALNUT



8"x40" ₹ 0.35" / 9 mm

Colour Shading

Available size

8"x40" ₹ 0.35" / 9 mm

Colour Shading

This porcelain tile product is manufactured with a V2 shade variation. Remember that the amount of colour as well as the texture of each piece may vary from tile to tile. Inspect the product immediately upon delivery and select tiles from many boxes during installation to minimize and blend any possible colour difference.














TRIM TILES

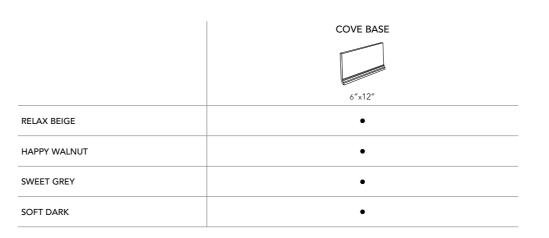

The colour of tiles printed in this catalogue may differ from actual tiles. Tile color reproductions in this catalogue are representative only. Slight tone and shade variations are inherent in porcelain tiles. Before selecting a colour, we recommend that you contact your local

representative, who will provide you with a sample piece of the requested tile.

INFORMATION

RECOMMENDED USE

Emotion is recommended for indoor floors, walls, countertops, and outdoor walls in commercial and residential application. The use of Emotion is not recommended for outdoor application or horizontal exterior surfaces. Landmark recommends an offset no greater than 30%, if a staggered pattern is required for tiles of 20" inches or longer.

CARE AND MAINTENANCE

Do not apply any wax or sealer to the product after installation. Regular cleaning is the best way to keep Emotion tiles looking good. Use clean, hot water (add household cleaner for more aggressive cleaning). Rinse thoroughly and dry with a soft cloth to prevent water spots. Please visit Icusa.com. For further information regarding the care and maintenance of Landmark products.

WARRANTY

Landmark guarantees that its products will meet or exceed the performance specifications set out in ANSI A137.1- 2012 and in the performance specifications section of the Landmark general catalogue. For more information, please visit our website at Icusa.com.



PROJECT

Charme Veined Statuario - 18"x36



Colour Shading



8"x40" ₹ 0.35" / 9 mm





