

PORCELAIN PERFORMANCE DATA

PHYSICAL PROPERTIES	TEST ASTM	NORTH AMERICAN STANDARD A137.1*	RESULTS
Water absorption *	C373	≤ 0.5%	COMPLY WITH ANSI A137.1
DCOF Average dynamic coefficient of friction **	BOT 3000 test	≥ 0.42	≥ 0.42
Resistance to freeze/thaw cycling *	C1026	As reported	RESISTANT
Resistance to thermal shock	C484	As reported	RESISTANT
Warpage (edge)	C485	Warpage ± 0.4% or ± 0.05 in	COMPLY WITH ANSI A137.1
Warpage (diagonal)	C485	Warpage ± 0.4% or ± 0.07 in	COMPLY WITH ANSI A137.1
Wedging	C502	± 0.25% or ± 0.03 in	COMPLY WITH ANSI A137.1
Chemical resistance	C650	As reported	UNAFFECTED
Resistance to stain	C1378	As reported	UNAFFECTED
Thickness	C499	Range: 0.04 in	COMPLY WITH ANSI A137.1
Breaking strength	C648	250 lbf or greater	COMPLY WITH ANSI A137.1

- Average values referred to our production and related to the matt finish of the product.
 As far as values relating to the matt finish of the product and to tests carried out by certified external laboratories whose results are avaible upon request at Headoffice, we are willing to check the lot you are
- Be sure to use tiles belonging to the same caliber.
- Test results are available on request.
- The information provided can be subject to change. Please refer to lcusa.com for the latest, most accurate and up-to-date information. The information provided can be subject to change. Please refer to Icusa.com for the latest, most accurate and up-to-date information.



























LEARN MORE ABOUT



NATURAL CONTEMPORANEITY

LANDMARK CERAMICS







COLORED BODY PORCELAIN TILE - Rectified Monocaliber

The color of tiles printed in this catalog may differ from actual tiles. Tile color reproductions in this catalog are representative only.

Slight tone and shade variations are inherent in porcelain tiles. Before selecting a color, we recommend that you contact your local representative,

This porcelain tile product is manufactured with a V2 shade variation. Remember that the amount of color as well as the texture of each piece

may vary from tile to tile. Inspect the product immediately upon delivery and select tiles from many boxes during installation to minimize and

who will provide you with a sample piece of the requested tile.

blend any possible color difference.



CHESTNUT



Color Shading










MATT FINISH

MATT FINISH

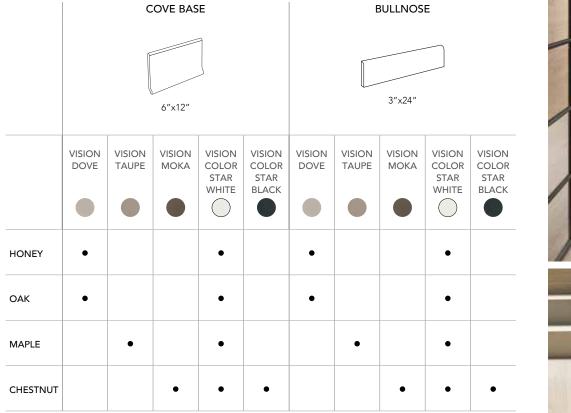

INFORMATION

RECOMMENDED USE

Feeling matt finish is recommended for indoor floors, walls, countertops, and outdoor walls in commercial and residential applications. The use of Feeling matt finish is not recommended for outdoor floors (for that application use Grip finish or Frontier20). Landmark recommends an offset no greater than 30%, if a staggered pattern is required for tiles of 20" inches or longer. Landmark recommends the use of leveler for a proper installation.

CARE AND MAINTENANCE

Do not apply any wax or sealer to the product after installation. Regular cleaning is the best way to keep tiles looking good. Use clean, hot water (add household cleaner for more aggressive cleaning). Rinse thoroughly and dry with a soft cloth to prevent water spots. Please visit Icusa.com. For further information regarding the care and maintenance of Landmark products.

OAK

MAPLE

Landmark guarantees that its products will meet or exceed the performance specifications set out in ANSI A137.1-2012 and in the performance specifications section of the Landmark general catalog. For more information, please visit our website at **Icusa.com**.



