

PORCELAIN PERFORMANCE DATA

COLORED BODY PORCELAIN - Rectified Monocaliber

PHYSICAL PROPERTIES	TEST ASTM	NORTH AMERICAN STANDARD A137.1	PORCELAIN TILES	PORCELAIN PAVERS FRONTIER20
			RESULTS	RESULTS
Water absorption *	C373	≤ 0.5%	COMPLY WITH	COMPLY WITH
			ANSI A137.1	ANSI A137.1
DCOF Average dynamic coefficient of friction **	BOT 3000 test	≥ 0.42	≥ 0.42	≥ 0.6
Skid Resistance	DIN 51097	-	-	A+B+C
	DIN 51130			R11
Resistance to freeze/thaw cycling *	C1026	As reported	RESISTANT	RESISTANT
Resistance to thermal shock	C484	As reported	RESISTANT	RESISTANT
Warpage (edge)	C485	Warpage ± 0.4%	COMPLY WITH	COMPLY WITH
		or ± 0.05 in	ANSI A137.1	ANSI A137.1
Warpage (diagonal)	C485	Warpage ± 0.4%	COMPLY WITH	COMPLY WITH
		or ± 0.07 in	ANSI A137.1	ANSI A137.1
Uedging Wedging	C502	± 0.25% or ± 0.03 in	COMPLY WITH	COMPLY WITH
			ANSI A137.1	ANSI A137.1
Chemical resistance	C650	As reported	UNAFFECTED	UNAFFECTED
Resistance to stain	C1378	As reported	UNAFFECTED	UNAFFECTED
Thickness	C499	Range: 0.04 in	COMPLY WITH	COMPLY WITH
			ANSI A137.1	ANSI A137.1
Breaking strength	C648	250 lbf	COMPLY WITH	≥ 2200 lbf
		or greater	ANSI A137.1	

- Average values referred to our production and related to the matt finish of the product.
 ** As far as values relating to the matt finish of the product and to tests carried out by certified external laboratories whose results are avaible upon request at Headoffice, we are willing to check the lot you are
- Be sure to use tiles belonging to the same caliber. Test results are available on request.
- The information provided can be subject to change. Please refer to lcusa.com for the latest, most accurate and up-to-date information.






































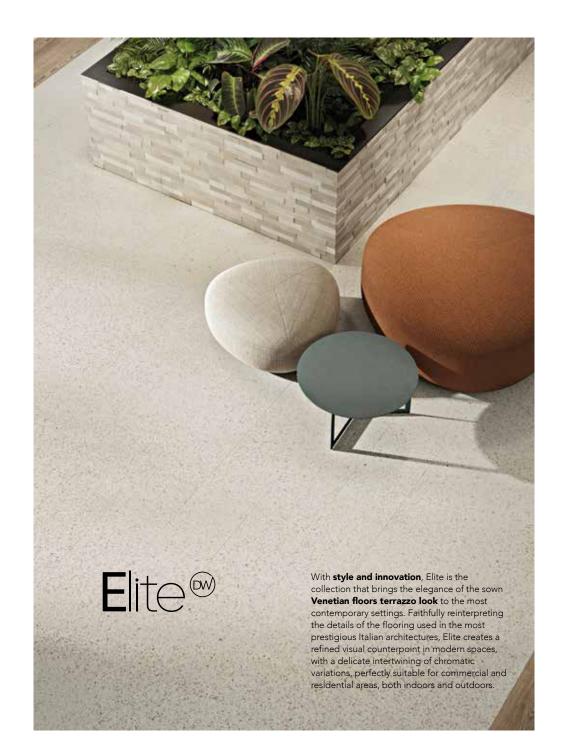

FASHION GREY

PRECIOUS BLACK

ELITE OYSTER BEIGE

ELITE DIAMOND WHITE

ELITE FASHION GREY

COLORED BODY PORCELAIN TILE - Rectified Monocaliber

DIAMOND WHITE Available sizes

OYSTER BEIGE Available sizes

The color of tiles printed in this catalog may differ from actual tiles. Tile color reproductions in this catalog are representative only. Slight tone and shade variations are inherent in porcelain tiles. Before selecting a color, we recommend that you contact your local representative, who will provide you with a sample piece of the Color Shading

This porcelain tile product is manufactured with a V2 shade variation. Remember that the amount of color as well as the texture of each piece may vary from tile to tile. Inspect the product immediately upon delivery and select tiles from many boxes during installation to minimize and blend any possible color difference.



SIZES 24"x24" / 12"x24"

MATT & GRIP FINISH

MATT FINISH

BULLNOSE 3"x24"

VISION DOVE / VISION COLOR STAR WHITE

MASTERPLAN PRECIOUS IVORY / MASTERPLAN WHITE AVENUE

VISION DOVE / VISION COLOR STAR WHITE

MASTERPLAN WHITE AVENUE

VISION CONCRETE / VISION COLOR STAR WHITE

MASTERPLAN COSMOPOLITAN ASH

VISION CONCRETE / VISION DARK

VISION COLOR STAR WHITE / VISION COLOR STAR BLACK

MASTERPLAN FASHION BLACK

Available sizes

±0.35" / 9 mm ± 0.35"

Available sizes

COORDINATED COVE BASE AND BULLNOSE FROM VISION, VISION COLOR AND MASTERPLAN COLLECTIONS

COVE BASE 6"x12"

VISION DOVE / VISION COLOR STAR WHITE

VISION DOVE / VISION COLOR STAR WHITE

VISION CONCRETE / VISION COLOR STAR WHITE

VISION CONCRETE / VISION DARK

VISION COLOR STAR WHITE / VISION COLOR STAR BLACK

FRONTIER20 COORDINATED PORCELAIN PAVERS WITH EITE®

COLORED BODY PORCELAIN PAVERS - Rectified Monocaliber

MATT FINISH











RECOMMENDED USE

Elite matt finish is recommended for indoor floors, walls, countertops, and outdoor walls in commercial and residential applications. The use of Elite matt finish is not recommended for outdoor floors (for that application use Grip finish or Frontier20). Landmark recommends an offset no greater than 30%, if a staggered pattern is required for tiles of 20" inches or longer. Landmark recommends the use of leveler for a proper installation.

CARE AND MAINTENANCE

Do not apply any wax or sealer to the product after installation. Regular cleaning is the best way to keep tiles looking good. Use clean, hot water (add household cleaner for more aggressive cleaning). Rinse thoroughly and dry with a soft cloth to prevent water spots. Please visit Icusa.com. For further information regarding the care and maintenance of Landmark products.

WARRANTY

Landmark guarantees that its products will meet or exceed the performance specifications set out in ANSI A137.1-2012 and in the performance specifications section of the Landmark general catalog. For more information, please visit our website at **Icusa.com**.



